

TIMPANO[®]

QUALITY YOU CAN TRUST



PROAUDIO

CARAUDIO



M SERIES



TPT-M6-8 8 Ohms
TPT-M6-4 4 Ohms



140 Watts	70 Watts	4Ω	94dB	130 - 7,500 Hz	1.4"	2.44"
CONT. POWER	RMS POWER	Ω	SENSITIVITY	FREQ. RESPONSE	VOICE COIL	MOUNT DEPTH
140 Watts	70 Watts	8Ω	94dB	130 - 7,500 Hz	1.4"	2.44"

MBSLIM SERIES



TPT-MB6 SLIM TPT-MB8 SLIM TPT-MB10 SLIM

6.5" Mid Bass 8" Mid Bass 10" Mid Bass

Continuous Power	200 Watts	300 Watts	400 Watts
RMS Power	100 Watts	150 Watts	200 Watts
Impedance	4 Ohms	4 Ohms	4 Ohms
Sensitivity	94 dB	95 dB	95 dB
Frequency Response	95 - 6,500 Hz	90 - 6,500 Hz	80 - 4,500 Hz
Voice Coil	1.5"	1.5"	1.5"
Mounting Depth	2.16"	2.67"	2.99"

MRSLIM SERIES

SHALLOW



TPT-MR6-4 SLIM TPT-MR8-4 SLIM TPT-MR10-4 SLIM

6.5" Mid Range 8" Mid Range 10" Mid Range

Continuous Power	200 Watts	400 Watts	400 Watts
RMS Power	100 Watts	200 Watts	200 Watts
Impedance	4 Ohms	4 Ohms	4 Ohms
Sensitivity	94 dB	95 dB	95 dB
Frequency Response	95 - 6,500 Hz	95 - 6,500 Hz	80 - 4,500 Hz
Voice Coil	1.5"	2"	2"
Mounting Depth	2.22"	2.56"	2.85"

NEO BULLET SERIES

PRO AUDIO LOUDSPEAKERS

PROAUDIO



TPT-NE05 BULLET

5.25" Mid Range

TPT-NE06 BULLET

6.5" Mid Range

Continuous Power	200 Watts	300 Watts
RMS Power	100 Watts	150 Watts
Impedance	4 Ohms	4 Ohms
Sensitivity	96 dB	96 dB
Frequency Response	240 - 13,600 Hz	150 - 12,500 Hz
Voice Coil	1.2"	1.5"
Basket Material	Die Cast Aluminum	Die Cast Aluminum
Magnet	Neodymium	Neodymium
Weight	1.66 Lbs each	2.38 Lbs each



NEODYMIUM SLIM DESIGN

TPT-NE08 BULLET

8" Mid Range

Continuous Power	400 Watts
RMS Power	200 Watts
Impedance	4 Ohms
Sensitivity	101 dB
Frequency Response	125 - 14,800 Hz
Voice Coil	1.5"
Basket Material	Die Cast Aluminum
Magnet	Neodymium
Weight	3.26 Lbs each



	Mounting Depth	Mounting Cut Out Ø
TPT-NE05 BULLET	1.97" (50 mm)	4.68" (119 mm)
TPT-NE06 BULLET	2.40" (61 mm)	5.76" (146.5 mm)
TPT-NE08 BULLET	2.95" (75 mm)	7.11" (181 mm)

NEOBULLET SERIES

MR BULLET SERIES

**FERRITE
MAGNET**



1.5" Voice Coil
4 Ohms

PROAUDIO



TPT-MR6-4 BULLET

6" Mid Range

Continuous Power	250 Watts
RMS Power	125 Watts
Impedance	4 Ohms
Sensitivity	94 dB
Frequency Response	160 - 10,000 Hz
Voice Coil	1.5"
Mounting Depth	2.58"



TPT-MR8-4 BULLET

8" Mid Range

Continuous Power	400 Watts
RMS Power	200 Watts
Impedance	4 Ohms
Sensitivity	95 dB
Frequency Response	125 - 11,000 Hz
Voice Coil	1.5"
Mounting Depth	3.25"

MD SERIES

PRO AUDIO LOUDSPEAKERS



TPT-MD6

6.5" Mid Range

TPT-MD8

8" Mid Range

TPT-MD10

10" Mid Bass

TPT-MD12

12" Mid Bass

Continuous Power	260 Watts	260 Watts	400 Watts	750 Watts
RMS Power	130 Watts	130 Watts	200 Watts	375 Watts
Impedance	8 Ohms	8 Ohms	8 Ohms	8 Ohms
Sensitivity	95 dB	95 dB	97 dB	97 dB
Frequency Response	150 - 9,500 Hz	80 - 9,500 Hz	65 - 4,000 Hz	55 - 5,000 Hz
Voice Coil	1.5"	1.5"	2.0"	2.5"
Mounting Depth	2.75"	3.19"	4.25"	5.10"

PROAUDIO



TPT-MD10 PRO

10" Mid Range

TPT-MD12 PRO

12" Mid Range

Continuous Power	700 Watts	800 Watts
RMS Power	350 Watts	400 Watts
Impedance	8 Ohms	8 Ohms
Sensitivity	100 dB	101 dB
Frequency Response	80 - 4,000 Hz	55 - 3,000 Hz
Voice Coil	3"	3"
Mounting Depth	4.33"	4.77"
Repair Parts	TPT-RPMD10 PRO	TPT-RPMD12 PRO



**MR BULLET
SERIES**

3

**MDPRO
SERIES**

4

DIGITAL FULL RANGE BRAZILIAN AMPLIFIERS



TPT800

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	600 Watts	—
RMS Power at 2 Ohms 12.6V:	300 Watts	600 Watts
RMS Power at 4 Ohms 12.6V:	—	300 Watts
RMS Power at 1 Ohm 14.4V:	800 Watts	—
RMS Power at 2 Ohms 14.4V:	400 Watts	800 Watts
RMS Power at 4 Ohms 14.4V:	—	400 Watts
Supply Voltage:	11 ~ 16 Vdc	
Frequency Response:	20 Hz ~ 18,000 Hz	
Crossover Low Pass:	100 Hz ~ 18,000 Hz	
Crossover High Pass:	—	
Dimensions (L x W x H):	5.57 x 5.11 x 2"	
Weight:	1.64 Lbs	

TPT1400

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	1,200 Watts	—
RMS Power at 2 Ohms 12.6V:	600 Watts	1,200 Watts
RMS Power at 4 Ohms 12.6V:	—	600 Watts
RMS Power at 1 Ohm 14.4V:	1,400 Watts	—
RMS Power at 2 Ohms 14.4V:	700 Watts	1,400 Watts
RMS Power at 4 Ohms 14.4V:	—	700 Watts
Supply Voltage:	11 ~ 16 Vdc	
Frequency Response:	20 Hz ~ 18,000 Hz	
Crossover Low Pass:	50 Hz ~ 2,000 Hz	
Crossover High Pass:	50 Hz ~ 2,000 Hz	
Dimensions (L x W x H):	5.57 x 7.28 x 2"	
Weight:	2.73 Lbs	



TPT3000EQ

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	3,000 Watts	—
RMS Power at 2 Ohms 12.6V:	2,100 Watts	3,000 Watts
RMS Power at 4 Ohms 12.6V:	1,150 Watts	2,100 Watts
RMS Power at 1 Ohm 14.4V:	3,550 Watts	—
RMS Power at 2 Ohms 14.4V:	2,400 Watts	3,600 Watts
RMS Power at 4 Ohms 14.4V:	1,500 Watts	2,400 Watts
Supply Voltage:	9.5 ~ 15 Vdc	
Frequency Response:	10 Hz ~ 25,000 Hz	
Crossover Low Pass:	50 Hz ~ 25,000 Hz	
Crossover High Pass:	10 Hz ~ 700 Hz	
Dimensions (L x W x H):	8.75" x 7.40" x 3"	
Weight:	5.5 Lbs	



TPT5000EQ

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	5,000 Watts	—
RMS Power at 2 Ohms 12.6V:	2,800 Watts	5,000 Watts
RMS Power at 4 Ohms 12.6V:	—	3,050 Watts
RMS Power at 1 Ohm 14.4V:	5,600 Watts	—
RMS Power at 2 Ohms 14.4V:	3,400 Watts	5,500 Watts
RMS Power at 4 Ohms 14.4V:	—	3,550 Watts
Supply Voltage:	9.5 ~ 15 Vdc	
Frequency Response:	10 Hz ~ 25,000 Hz	
Crossover Low Pass:	50 Hz ~ 25,000 Hz	
Crossover High Pass:	10 Hz ~ 700 Hz	
Dimensions (L x W x H):	11.57" x 12.20" x 3"	
Weight:	9.0 Lbs	

2 & 4 CHANNEL AMPLIFIERS



TPT400.2

2 Ohms

Number of Channels:	2	4
RMS Power at 2 Ohms 12.6V:	2x 150 Watts	4x 150 Watts
RMS Power at 4 Ohms 12.6V:	2x 75 Watts	4x 75 Watts
Bridged RMS Power at 4 Ohms 12.6V:	1x 300 Watts	2x 300 Watts
RMS Power at 2 Ohms 14.4V:	2x 200 Watts	4x 200 Watts
RMS Power at 4 Ohms 14.4V:	2x 100 Watts	4x 100 Watts
Bridged RMS Power at 4 Ohms 14.4V:	1x 400 Watts	2x 400 Watts
Supply Voltage:	11 ~ 16 Vdc	
Frequency Response:	20 Hz ~ 20,000 Hz	
Crossover Low Pass:	100 Hz	
Crossover High Pass:	125 Hz	
Dimensions (L x W x H):	5.57" x 4.64" x 2"	
Weight:	1.25 Lbs	

TPT800.4

2 Ohms

Number of Channels:	2	4
RMS Power at 2 Ohms 12.6V:	2x 150 Watts	4x 150 Watts
RMS Power at 4 Ohms 12.6V:	2x 75 Watts	4x 75 Watts
Bridged RMS Power at 4 Ohms 12.6V:	1x 300 Watts	2x 300 Watts
RMS Power at 2 Ohms 14.4V:	2x 200 Watts	4x 200 Watts
RMS Power at 4 Ohms 14.4V:	2x 100 Watts	4x 100 Watts
Bridged RMS Power at 4 Ohms 14.4V:	1x 400 Watts	2x 400 Watts
Supply Voltage:	11 ~ 16 Vdc	
Frequency Response:	20 Hz ~ 20,000 Hz	
Crossover Low Pass:	100 Hz	
Crossover High Pass:	125 Hz	
Dimensions (L x W x H):	5.57" x 5.11" x 2"	
Weight:	2.00 Lbs	



TPT8000EQ

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	8,000 Watts	—
RMS Power at 2 Ohms 12.6V:	5,100 Watts	8,000 Watts
RMS Power at 4 Ohms 12.6V:	3,030 Watts	5,000 Watts
RMS Power at 1 Ohm 14.4V:	8,900 Watts	—
RMS Power at 2 Ohms 14.4V:	6,000 Watts	8,950 Watts
RMS Power at 4 Ohms 14.4V:	4,000 Watts	6,050 Watts
Supply Voltage:	9.5 ~ 15 Vdc	
Frequency Response:	10 Hz ~ 15,000 Hz	
Crossover Low Pass:	50 Hz ~ 15,000 Hz	
Crossover High Pass:	10 Hz ~ 700 Hz	
Dimensions (L x W x H):	11.57" x 17.51" x 3"	
Weight:	13.9 Lbs	



TPT10500EQ

1 Ohm 2 Ohms

Number of Channels:	1	1
RMS Power at 1 Ohm 12.6V:	10,500 Watts	—
RMS Power at 2 Ohms 12.6V:	6,400 Watts	10,500 Watts
RMS Power at 4 Ohms 12.6V:	3,900 Watts	6,200 Watts
RMS Power at 1 Ohm 14.4V:	11,600 Watts	—
RMS Power at 2 Ohms 14.4V:	7,300 Watts	11,600 Watts
RMS Power at 4 Ohms 14.4V:	4,800 Watts	7,500 Watts
Supply Voltage:	9.5 ~ 15 Vdc	
Frequency Response:	10 Hz ~ 15,000 Hz	
Crossover Low Pass:	50 Hz ~ 15,000 Hz	
Crossover High Pass:	10 Hz ~ 700 Hz	
Dimensions (L x W x H):	11.57" x 20" x 3"	
Weight:	16.5 Lbs	

EQUALIZER

Timpano Catalog 2020



TPT-EQ7

7-Band Graphic Equalizer

1/2 - DIN Graphic Equalizer / Crossover
6-Channel / 8-Volt RCA Line-Level Output
2 Selectable Inputs
Subwoofer-Level Control



CROSSOVER



TPT-360

3-way Electronic Crossover

2/4/6 Channel Input
6-Channel / 5 Volt RCA Outputs
(Front/Rear/Subwoofer)
Front/Rear/Subwoofer Level Control
Subwoofer Equalizer and Boost Level Control
High-Pass Crossover Frequency Multiplier
Remote Level Control (included)
Gold Plated Terminals

CABLES

RCA Audio Signal Cable	Description	Length
TPT-RCA3FT	2 Channel RCA Cable	3 ft
TPT-RCA10FT	2 Channel RCA Cable	10 ft
TPT-RCA20FT	2 Channel RCA Cable	20 ft
TPT-RCA2F1M	2 Female to 1 Male Y RCA Cable	1 ft
TPT-RCA1F2M	1 Female to 2 Male Y RCA Cable	1 ft

Clear Flexible Jacket
Color-Coded Connectors
Noise Rejecting Construction



SUBWOOFERS



TPT-SW10 4+4

10" Subwoofer

Continuous Power	400 - 800 Watts
RMS Power	200 - 400 Watts
Impedance	Dual 4 Ohms
XMax	6.75 mm
Fs	45 Hz
Voice Coil	2"
Mounting Depth	4.60"

TPT-SW12 4+4

12" Subwoofer

Continuous Power	400 - 800 Watts
RMS Power	200 - 400 Watts
Impedance	Dual 4 Ohms
XMax	6.75 mm
Fs	42 Hz
Voice Coil	2"
Mounting Depth	5.16"

T_{SUB} SERIES

CARAUDIO

DUAL
4 Ohms



TPT-TSUB12 D4

12" Subwoofer

Continuous Power	1600 Watts
RMS Power	800 Watts
Impedance	Dual 4 Ohms
XMax Peak to Peak	30 mm „
Frequency Response	32 - 300 Hz
Voice Coil	2.5"
Mounting Depth	6.16"

TPT-TSUB15 D4

15" Subwoofer

Continuous Power	1800 Watts
RMS Power	900 Watts
Impedance	Dual 4 Ohms
XMax Peak to Peak	30 mm
Frequency Response	30 Hz - 250 Hz
Voice Coil	2.5"
Mounting Depth	7.32"

SUBWOOFERS

8

EQUALIZERS
CROSSEOVERS
CABLES

7

1" COMPRESSION DRIVERS

Timpano Catalog 2020

2" COMPRESSION DRIVERS



TPT-D250X

1" Exit Phenolic
Compression Driver

TPT-DH100

1" Exit Plastic Horn
+ Neodymium Driver

TPT-DH150

1" Exit Plastic Horn
+ Ferrite Driver

TPT-DH175

1" Exit Plastic Horn
+ Ferrite Driver

TPT-DH175S

1" Exit Plastic Horn
+ Ferrite Driver

TPT-DH2000

2" Exit Aluminum Horn
+ Ferrite Driver

TPT-DH2000 PRO

2" Exit Aluminum Horn
+ Ferrite Driver

TPT-D3200TI-ND

2" Exit Titanium
Compression Driver

TPT-D3000

2" Exit Titanium
Compression Driver

Continuous Power	150 Watts	150 Watts	150 Watts	150 Watts	150 Watts	200 Watts	200 Watts	200 Watts	200 Watts
RMS Power	75 Watts	75 Watts	75 Watts	75 Watts	75 Watts	100 Watts	100 Watts	100 Watts	100 Watts
Impedance	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms	8 Ohms
Sensitivity	107 dB	106 dB	104 dB	108 dB	108 dB	109 dB	110 dB	110 dB	108 dB
Frequency Response	400 - 8,000 Hz	1,500 - 18,000 Hz	1,500 - 18,000 Hz	1,300 - 19,000 Hz	1,300 - 19,000 Hz	1,000 - 20,000 Hz	1,000 - 20,000 Hz	1,600 - 19,000 Hz	1,500 - 15,000 Hz
Voice Coil	2"	1"	1"	1"	1"	2"	2"	3"	3"
Mounting Depth	-	3.25"	2.75"	4.60"	4"	5.75"	7.32"	-	-
Repair Parts	TPT-RPD250	-	TPT-RPDH150	TPT-RPDH175	TPT-RPDH175	TPT-RPDH2000	TPT-RPDH2000	TPT-RPD3200TI-ND	TPT-RPD3000

TWEETERS



Sold in Pairs



Sold in Pairs



Sold in Pairs



TPT-ST1

1" Tweeter

TPT-ST2

4" Super Tweeter

TPT-ST2 BLACK

4" Super Tweeter

TPT-ST3 BLACK

3.75" Super Tweeter

TPT-ST4 CHROME

3.5" Super Tweeter

TPT-ST4 BLACK

4" Super Tweeter

TPT-ST22

4" Super Tweeter

Continuous Power	150 Watts	120 Watts	120 Watts	120 Watts	120 Watts	120 Watts	160 Watts
RMS Power	35 Watts	60 Watts	60 Watts	60 Watts	60 Watts	60 Watts	80 Watts
Impedance	4 Ohms	4 Ohms	4 Ohms	4 Ohms	4 Ohms	4 Ohms	8 Ohms
Sensitivity	100 dB	105 dB	105 dB	105 dB	105 dB	105 dB	105 dB
Frequency Response	5,000 - 20,000 Hz	2,000 - 23,000 Hz	2,000 - 23,000 Hz	2,000 - 23,000 Hz	2,000 - 22,000 Hz	2,000 - 22,000 Hz	2,000 - 20,000 Hz
Voice Coil	1"	1"	1"	1"	1"	1"	1.75"
Mounting Depth	-	1.40"	1.40"	1.59"	2.39"	2.39"	2.50"
Repair Parts	-	-	-	TPT-RPST3	TPT-RPST4	TPT-RPST4	TPT-RPTST22

HORNS & WAVEGUIDES



TPT-HL14-50 SLIM

2" Exit Horn

Aluminum Horn
MOUNTING DEPTH 2.95"
W x H: 6.10" x 2.95"



TPT-HL14-50 SLIM


1" Exit Screw-On Horn

Plastic Horn
MOUNTING DEPTH 2.71"
W x H: 4.52" x 2.95"



TIMPANO

QUALITY YOU CAN TRUST

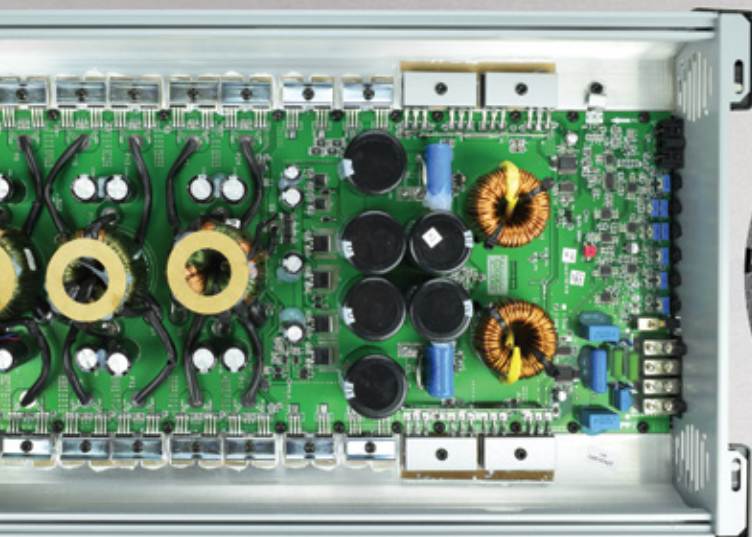

DIGITAL FULL RANGE AMPLIFIERS  MADE IN BRAZIL



MR. "T"

FIND US ON:



TIMPANO AUDIO

Timpano is a PRV Audio Group Company.

